



Secure Temp® S2100

Reduced Clearance Ceiling Support

It's the "Swiss Army Knife" of Ceiling Support Boxes!


You asked for more versatility, and we delivered.

Why stock two or more ceiling supports when a single box can be used for all three vertical chimney applications?



XRCS shown with standard Square-to-Round Collar


That's what you get with the Reduced Clearance Ceiling Support for use with Security Chimney's Secure Temp® S2100 insulated chimney.

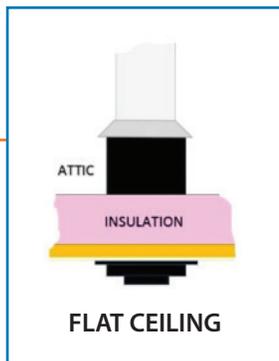

FLAT CEILING



VAULTED CEILING

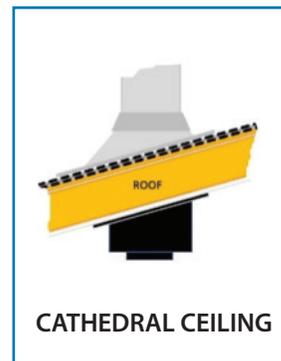

CATHEDRAL CEILING

This new box design fulfills plenty of other common requests too. The list of standard features below will quickly make this your go-to ceiling support:

This new box design fulfills plenty of other common requests too. The list of standard features below will quickly make this your go-to ceiling support:

1. Works within Smaller Openings – The XRCS is factory-tested and certified to reduce surrounding clearances-to-combustibles around the box from 2" to just 1". This allows a 6" S2100 chimney to be installed within a 12 & 1/8" x 12 & 1/8" opening. Versions of the XRCS are also available for use with 7" and 8" pipe too, although framing dimensions will correspond to diameter.

2. Can act as an Attic Radiation Shield* - When the ceiling penetration is right at the attic, fix the square-to-round collar (included at no extra charge) around the chimney, then push down atop the box to complete the assembly. This eliminates the need for a separate Attic Radiation Shield component. Aside from one less part to worry about, assembly is quicker.

3. Integrated Starter Collar and Built-In Stovepipe Adapter – Like other S2100 ceiling supports, the first chimney length simply twist-locks within the support,

and the adapter works with both single-wall and double-wall stovepipe. No additional parts are required.

4. Comes with Finish Trim – Our two-piece adjustable trim is pre-painted to match the box. The overlapping ends allow it to work with both flat and pitched ceilings. The end-result is a clean, professional finish.

5. Best of all, the XRCS is insulated! – We include a batt of rockwool insulation with each & every XRCS box we sell. For both new constructions and retrofit installations. Providing the vapor barrier is secured to the box's perimeter, this factory-sealed assembly will help to minimize leakage of air from conditioned spaces (warm) up into unconditioned spaces (cold). Ideal for today's high-efficient homes.

*XRCS Reduced Clearance Ceiling Support has a standard 24" Box Height. A minimum of 3 1/2" must protrude below the ceiling to ensure appropriate clearances for stovepipe. If additional box height is required, a matching 24" Support Box Extension (XSE) is available. With 2" overlap, provides up to 22" in additional height. Be sure to read instructions closely prior to starting an installation.